

ReTac®

RTM54164 - 3Drytac Retac Wall Vinyl Matt

Smooth 75


EASY APPLICATION AND REMOVAL

A 75 micron, printable white polymeric PVC film coated on one side with ReTac® ultra removable adhesive. With ReTac® adhesive technology, there is no need to worry about surface damage during graphic removal. ReTac® Smooth 75 can be removed and repositioned multiple times without a decrease in bond strength. It has a Class 0 fire rating, making it ideal for use on most indoor surfaces and for applications in public areas that require compliance with strict fire regulations, such as airports, hotels and hospitals.

Recommended for curved, textured or angled surfaces where conformability is a priority.

- IDEAL FOR INTERIOR PROMOTIONS
- PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS

Product Code: RTC & RTM

75 White
micron Phthalate-Free
Polymeric
PVC  Gloss or
Matte



(Eco)Solvent
Latex
UV




ReTac® ultra removable
and re-positionable
adhesive



Widths up to 1370mm



5 YEARS DURABILITY
INTERIOR AND EXTERIOR
(2 YEAR REMOVABILITY EXTERIOR)

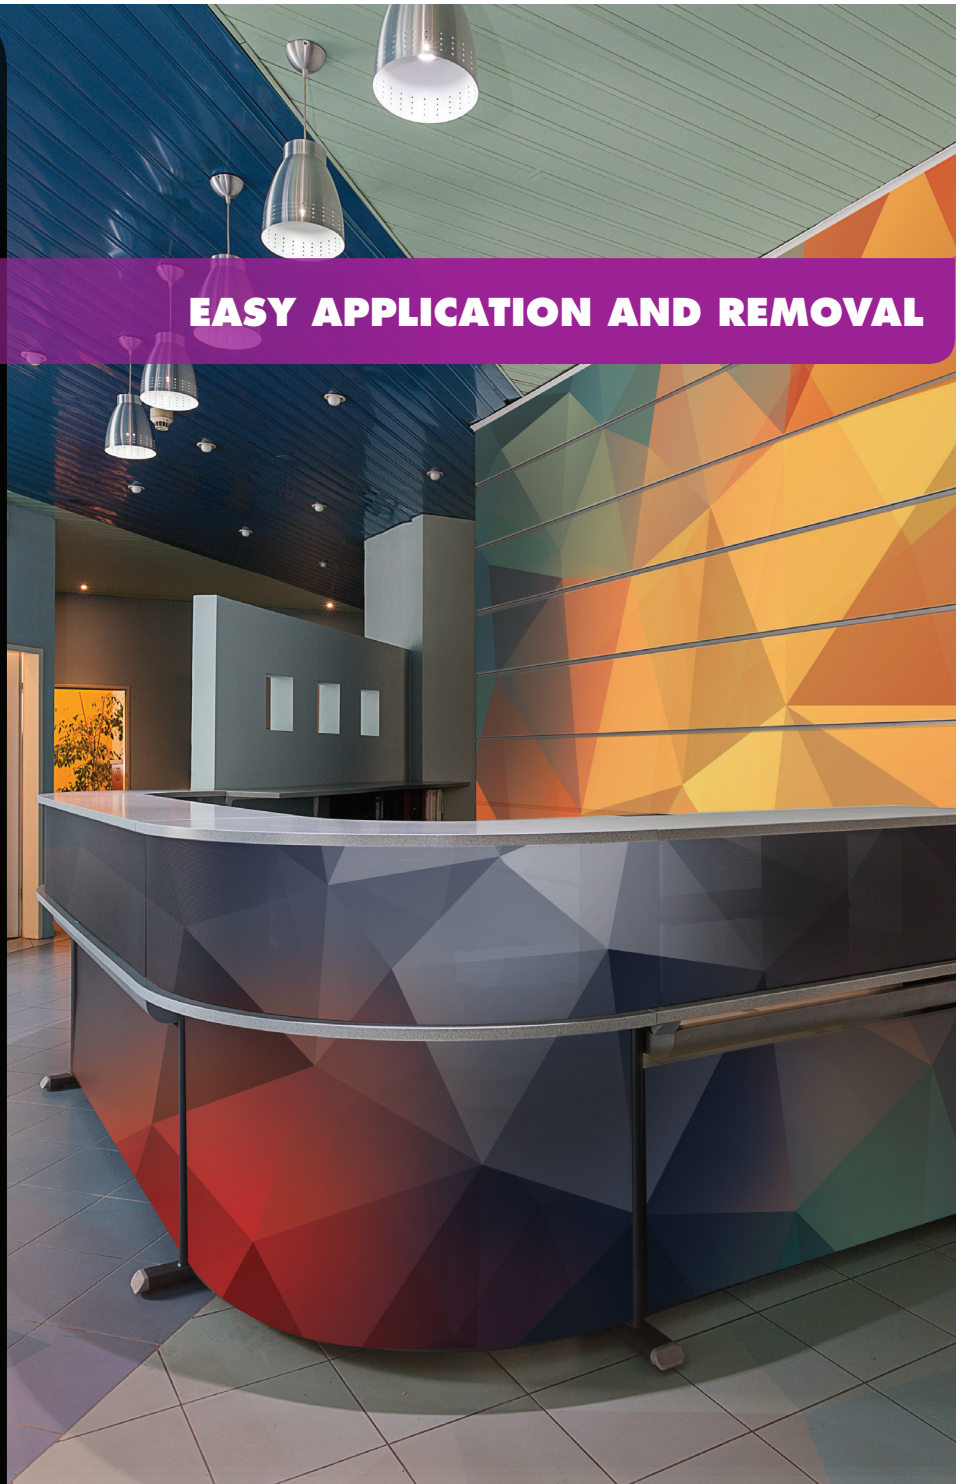

APPLICATIONS

- Curved Surfaces
- Exhibition Graphics
- Interior Décor
- Removable Decals



Certified for
HP Latex Inks



DRYTAC®
ADHESIVE SCIENCE

Smooth 75

TECHNICAL SPECIFICATION

ReTac® Smooth 75 is a 75µ (3 mil) printable gloss or matte white, phthalate-free polymeric PVC film, coated on one side with ReTac® ultra removable adhesive. The adhesive is protected by a single-sided, siliconised PE coated Kraft release liner. This high quality, ink receptive printable vinyl was specifically developed for easy application and removal of vibrant graphics to a wide range of substrates. ReTac® Smooth 75 can be easily applied, re-positioned and removed without surface damage or loss of adhesion.

- RETAC® IS A PHTHALATE-FREE FILM.
- IDEAL FOR REMOVABLE WALL DECALS, APPLIQUES AND WALL MURALS.
- SUITABLE FOR USE ON MOST INDOOR SURFACES, PAINTED WALLS, MELAMINE, GLASS, AND LOW SURFACE ENERGY SUBSTRATES.
- RETAC® SMOOTH 75 HAS A CLASS 0 FIRE RATING ACCORDING TO UK STANDARDS FOR SURFACE SPREAD OF FLAME, MAKING IT PERFECT FOR APPLICATIONS IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS, SUCH AS AIRPORTS, HOTELS AND HOSPITALS.

Please Note: Plasticizer migration from some PVC substrates could cause adhesive residue being left behind upon removal

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2020 Drytac Corporation. E&OE.
All other trademarks are the property of their respective owners.

PRODUCT STRUCTURE

Film	Matte or Gloss White Polymeric PVC
Adhesive	ReTac® ultra removable and re-positionable adhesive technology
Release Liner	135gsm 1 side siliconised clay coated kraft liner

PRODUCT CHARACTERISTICS

Film Thickness	3 mil (75µ)	3.7 mil (93µ)
Adhesive Layer	0.7 mil (18µ)	
Outdoor Durability	5 year; 2 years removability	
Application Temperature	>41°F (5°C)	
Service Temperature Range	40°F to 120°F (4.4°C to 48.9°C)	
Flame Ratings	Class 0 (BS 476 - Part 6 & 7) Class C-s1, d0 (EN 13501-1) PASS (CAN/ULC-S102)	
Shelf Life	2 years	
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity	

OVERLAMINATE RECOMMENDATIONS

When using ReTac® Smooth 75, an overlaminate can be used for maximum life expectancy. Products recommended for use with ReTac® Smooth 75 are Drytac's Weathershield® overlaminates.



DRYTAC®
ADHESIVE SCIENCE

Johannesburg

Unit 21, Hylauma Street,
Fern Towers, Ferndale,
Randburg, Gauteng
South Africa
consumables@midcomp.co.za
Tel: +27 (0) 10 020 9999

Cape Town

Unit 1, 4 Platinum Close,
Phoenix, Cape Town
Western Cape,
South Africa
cptorders@midcomp.co.za
Tel: +27 (0) 21 552 3453

Durban

Unit 1, Janic Park,
30 Moreland Drive, Redhill
Durban, Kwa-Zulu Natal,
South Africa
consumables@midcomp.co.za
Tel: +27 (0) 10 020 9999