

# SpotOn®

## Duo

SpotOn Duo is a versatile, double-sided mounting adhesive designed to help print providers create stunning retail graphics with ease. Featuring a permanent adhesive on one side and Drytac's signature removable SpotOn dot-pattern adhesive on the other, this innovative solution transforms non-adhesive backed graphics into peel-and-stick displays that are simple to apply and reposition.

Perfect for synthetic blackout papers or cardstocks printed on both sides, SpotOn Duo excels in dynamic push/pull messaging for storefront glass displays and other retail applications. Its unique construction ensures seamless application and removal, making it ideal for both professional and DIY installations.

Product Code: SPOD



Clear Permanent Acrylic  
Pressure-Sensitive  
Adhesive

**23**  
micron

Clear  
Polyester  
(PET)



Clear Removable  
SpotOn Dot Pattern  
Adhesive



Widths up to 1300 mm



3 YEARS DURABILITY  
INTERIOR



6 MONTHS DURABILITY  
EXTERIOR

CREATE EASY TWO-WAY WINDOW GRAPHICS




## APPLICATIONS

Two-Sided Window Graphics

Push/Pull

Smooth Surfaces

Point Of Sale Graphics

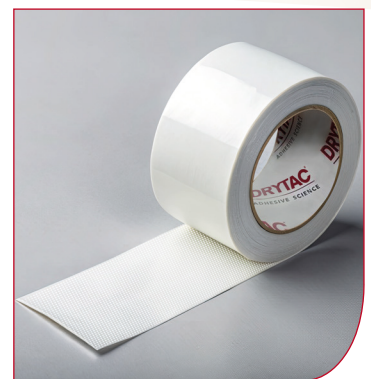

**DRYTAC®**

010 020 9999

consumables@midcomp.co.za

www.midcomp.com

# SpotOn®

## Duo

SpotOn® Duo is a unique, clear double-sided mounting adhesive film engineered for hassle-free, bubble-free installation.

This self-wound construction features a 0.8 mil (21µ) permanent acrylic pressure sensitive adhesive on one side and a 0.5 mil (13µ) layer of SpotOn®'s signature removable dot pattern adhesive on the other—delivering strong adhesion to graphics and easy, clean removability from application surfaces. Built on a 0.9 mil (23µ) PET carrier, SpotOn® Duo is ideal for mounting graphics to smooth surfaces where repositionability and ease of installation are essential.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2025 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

0425

## TECHNICAL SPECIFICATION

### PRODUCT STRUCTURE

<b>Adhesive</b>	Permanent Acrylic (Pressure Sensitive)
<b>Film</b>	Clear PET
<b>Adhesive</b>	SpotOn® Dot Pattern Removable Adhesive
<b>Release Liner</b>	100g 2 side PE Kraft

### PRODUCT CHARACTERISTICS

<b>Adhesive Layer (Permanent)</b>	0.8 mil (21µ)
<b>Film Thickness</b>	0.9 mil (23µ)
<b>Adhesive Layer (Dot Pattern Removable)</b>	0.5 mil (13µ)
<b>Outdoor Durability</b>	6 Months
<b>Application Temperature</b>	41°F (5°C)
<b>Service Temperature Range</b>	41°F to 140°F (5°C to 60°C)
<b>Shelf Life</b>	2 Years
<b>Storage Conditions</b>	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

### PROCESS SETTINGS

Equipment Type & Temperature	Speed
<b>Roller Laminator</b> Room temperature to 104°F (40°C)	1 ft to 8 ft (0.3m to 2.5m) per minute
<b>Press</b>	Not recommended



# DRYTAC®